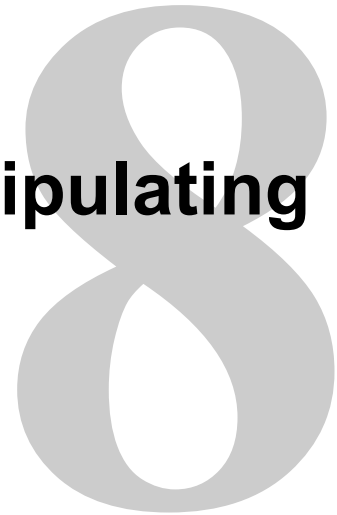

Manipulating Data

Copyright © 2004, Oracle. All rights reserved.

Objectives

After completing this lesson, you should be able to do the following:

- Describe each data manipulation language (DML) statement
- Insert rows into a table
- Update rows in a table
- Delete rows from a table
- Control transactions

Copyright © 2004, Oracle. All rights reserved.

Data Manipulation Language

- A DML statement is executed when you:
  - Add new rows to a table
  - Modify existing rows in a table
  - Remove existing rows from a table
- A *transaction* consists of a collection of DML statements that form a logical unit of work.

Copyright © 2004, Oracle. All rights reserved.

Adding a New Row to a Table

70	Public Relations	100	1700

New row

DEPARTMENTS

DEPARTMENT_ID	DEPARTMENT_NAME	MANAGER_ID	LOCATION_ID
10	Administration	200	1700
20	Marketing	201	1800
50	Shipping	124	1500
60	IT	103	1400
80	Sales	149	2500
90	Executive	100	1700
110	Accounting	205	1700
190	Contracting		1700

Insert new row into the **DEPARTMENTS** table

DEPARTMENT_ID	DEPARTMENT_NAME	MANAGER_ID	LOCATION_ID
10	Administration	200	1700
20	Marketing	201	1800
50	Shipping	124	1500
60	IT	103	1400
80	Sales	149	2500
90	Executive	100	1700
110	Accounting	205	1700
190	Contracting		1700
70	Public Relations	100	1700

Copyright © 2004, Oracle. All rights reserved.

INSERT Statement Syntax

- Add new rows to a table by using the INSERT statement:

```
INSERT INTO   table [(column [, column...])]
VALUES        (value [, value...]);
```

- With this syntax, only one row is inserted at a time.

Copyright © 2004, Oracle. All rights reserved.

Inserting New Rows

- Insert a new row containing values for each column.
- List values in the default order of the columns in the table.
- Optionally, list the columns in the `INSERT` clause.

```
INSERT INTO departments(department_id,
       department_name, manager_id, location_id)
VALUES (70, 'Public Relations', 100, 1700);
1 row created.
```

- Enclose character and date values in single quotation marks.

Copyright © 2004, Oracle. All rights reserved.

Inserting Rows with Null Values

- **Implicit method: Omit the column from the column list.**

```
INSERT INTO   departments (department_id,
                           department_name )
VALUES        (30, 'Purchasing');
1 row created.
```

- **Explicit method: Specify the `NULL` keyword in the `VALUES` clause.**

```
INSERT INTO   departments
VALUES        (100, 'Finance', NULL, NULL);
1 row created.
```


Copyright © 2004, Oracle. All rights reserved.

Inserting Special Values

The `SYSDATE` function records the current date and time.

```
INSERT INTO employees (employee_id,
                       first_name, last_name,
                       email, phone_number,
                       hire_date, job_id, salary,
                       commission_pct, manager_id,
                       department_id)
VALUES                (113,
                       'Louis', 'Popp',
                       'LPOPP', '515.124.4567',
                       SYSDATE, 'AC_ACCOUNT', 6900,
                       NULL, 205, 100);
1 row created.
```


Copyright © 2004, Oracle. All rights reserved.

Inserting Specific Date Values

- **Add a new employee.**

```
INSERT INTO employees
VALUES      (114,
             'Den', 'Raphealy',
             'DRAPHEAL', '515.127.4561',
             TO_DATE('FEB 3, 1999', 'MON DD, YYYY'),
             'AC_ACCOUNT', 11000, NULL, 100, 30);
1 row created.
```

- **Verify your addition.**

EMPLOYEE_ID	FIRST_NAME	LAST_NAME	EMAIL	PHONE_NUMBER	HIRE_DATE	JOB_ID	SALARY	COMMISSION_P
114	Den	Raphealy	DRAPHEAL	515.127.4561	03-FEB-99	AC_ACCOUNT	11000	

Copyright © 2004, Oracle. All rights reserved.

Creating a Script

- Use & substitution in a SQL statement to prompt for values.
- & is a placeholder for the variable value.

```
INSERT INTO departments
            (department_id, department_name, location_id)
VALUES      (&department_id, '&department_name',&location);
```

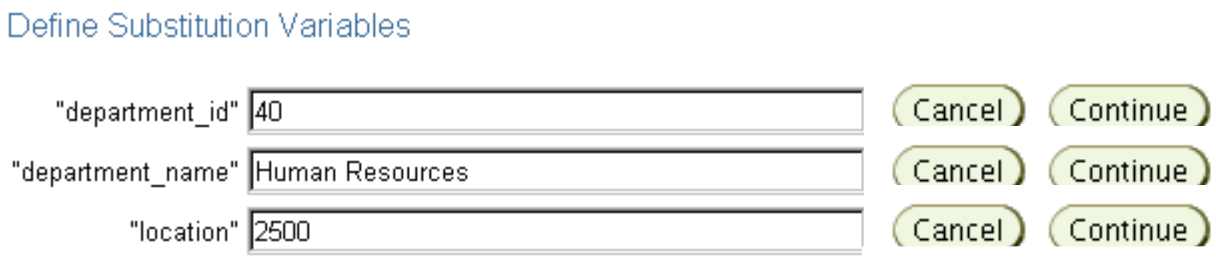


```
1 row created.
```


Copyright © 2004, Oracle. All rights reserved.

Copying Rows from Another Table

- Write your `INSERT` statement with a subquery:

```
INSERT INTO sales_reps(id, name, salary, commission_pct)
  SELECT employee_id, last_name, salary, commission_pct
  FROM   employees
  WHERE  job_id LIKE '%REP%';

4 rows created.
```

- Do not use the `VALUES` clause.
- Match the number of columns in the `INSERT` clause to those in the subquery.

Copyright © 2004, Oracle. All rights reserved.

Changing Data in a Table

EMPLOYEES

EMPLOYEE_ID	FIRST_NAME	LAST_NAME	EMAIL	HIRE_DATE	JOB_ID	SALARY	DEPARTMENT_ID	COMMISSION_P
100	Steven	King	SKING	17-JUN-87	AD_PRES	24000	90	
101	Neena	Kochhar	NKOCHHAR	21-SEP-89	AD_VP	17000	90	
102	Lex	De Haan	LDEHAAN	13-JAN-93	AD_VP	17000	90	
103	Alexander	Hunold	AHUNOLD	03-JAN-90	IT_PROG	9000	60	
104	Bruce	Ernst	BERNST	21-MAY-91	IT_PROG	6000	60	
107	Diana	Lorentz	DLORENTZ	07-FEB-99	IT_PROG	4200	60	
124	Kevin	Mourgos	KMOURGOS	16-NOV-99	ST_MAN	5800	50	

Update rows in the EMPLOYEES table:

EMPLOYEE_ID	FIRST_NAME	LAST_NAME	EMAIL	HIRE_DATE	JOB_ID	SALARY	DEPARTMENT_ID	COMMISSIO
100	Steven	King	SKING	17-JUN-87	AD_PRES	24000	90	
101	Neena	Kochhar	NKOCHHAR	21-SEP-89	AD_VP	17000	90	
102	Lex	De Haan	LDEHAAN	13-JAN-93	AD_VP	17000	90	
103	Alexander	Hunold	AHUNOLD	03-JAN-90	IT_PROG	9000	30	
104	Bruce	Ernst	BERNST	21-MAY-91	IT_PROG	6000	30	
107	Diana	Lorentz	DLORENTZ	07-FEB-99	IT_PROG	4200	30	
124	Kevin	Mourgos	KMOURGOS	16-NOV-99	ST_MAN	5800	50	

Copyright © 2004, Oracle. All rights reserved.

UPDATE Statement Syntax

- Modify existing rows with the UPDATE statement:

```
UPDATE      table
SET         column = value [, column = value, ...]
[WHERE      condition];
```

- Update more than one row at a time (if required).

Copyright © 2004, Oracle. All rights reserved.

Updating Rows in a Table

- Specific row or rows are modified if you specify the `WHERE` clause:

```
UPDATE employees
SET    department_id = 70
WHERE  employee_id = 113;
1 row updated.
```

- All rows in the table are modified if you omit the `WHERE` clause:

```
UPDATE   copy_emp
SET      department_id = 110;
22 rows updated.
```


Copyright © 2004, Oracle. All rights reserved.

Updating Two Columns with a Subquery

Update employee 114's job and salary to match that of employee 205.

```
UPDATE    employees
SET       job_id   = (SELECT   job_id
                      FROM     employees
                      WHERE    employee_id = 205),
          salary   = (SELECT   salary
                      FROM     employees
                      WHERE    employee_id = 205)
WHERE     employee_id     =  114;
1 row updated.
```


Copyright © 2004, Oracle. All rights reserved.

Updating Rows Based on Another Table

Use subqueries in `UPDATE` statements to update rows in a table based on values from another table:

```
UPDATE   copy_emp
SET      department_id  =  (SELECT department_id
                           FROM employees
                           WHERE employee_id = 100)
WHERE    job_id         =  (SELECT job_id
                           FROM employees
                           WHERE employee_id = 200);
1 row updated.
```


Copyright © 2004, Oracle. All rights reserved.

Removing a Row from a Table

DEPARTMENTS

DEPARTMENT_ID	DEPARTMENT_NAME	MANAGER_ID	LOCATION_ID
10	Administration	200	1700
20	Marketing	201	1800
30	Purchasing		
100	Finance		
50	Shipping	124	1500
60	IT	103	1400

Delete a row from the DEPARTMENTS table:

DEPARTMENT_ID	DEPARTMENT_NAME	MANAGER_ID	LOCATION_ID
10	Administration	200	1700
20	Marketing	201	1800
30	Purchasing		
50	Shipping	124	1500
60	IT	103	1400

Copyright © 2004, Oracle. All rights reserved.

DELETE Statement

You can remove existing rows from a table by using the DELETE statement:

```
DELETE [FROM]   table
[WHERE          condition];
```


Copyright © 2004, Oracle. All rights reserved.

Deleting Rows from a Table

- Specific rows are deleted if you specify the `WHERE` clause:

```
DELETE FROM departments
WHERE  department_name = 'Finance';
1 row deleted.
```

- All rows in the table are deleted if you omit the `WHERE` clause:

```
DELETE FROM  copy_emp;
22 rows deleted.
```


Copyright © 2004, Oracle. All rights reserved.

Deleting Rows Based on Another Table

Use subqueries in `DELETE` statements to remove rows from a table based on values from another table:

```
DELETE FROM employees
WHERE  department_id =
                (SELECT department_id
                 FROM   departments
                 WHERE  department_name
                        LIKE '%Public%');
1 row deleted.
```


Copyright © 2004, Oracle. All rights reserved.

TRUNCATE Statement

- Removes all rows from a table, leaving the table empty and the table structure intact
- Is a data definition language (DDL) statement rather than a DML statement; cannot easily be undone
- Syntax:

```
TRUNCATE TABLE table_name;
```

- Example:

```
TRUNCATE TABLE copy_emp;
```


Copyright © 2004, Oracle. All rights reserved.

Using a Subquery in an INSERT Statement

```
INSERT INTO
        (SELECT employee_id, last_name,
                email, hire_date, job_id, salary,
                department_id
         FROM   employees
         WHERE  department_id = 50)
VALUES (99999, 'Taylor', 'DTAYLOR',
        TO_DATE('07-JUN-99', 'DD-MON-RR'),
        'ST_CLERK', 5000, 50);

1 row created.
```


Copyright © 2004, Oracle. All rights reserved.

Using a Subquery in an INSERT Statement

Verify the results:

```
SELECT employee_id, last_name, email, hire_date,
       job_id, salary, department_id
FROM   employees
WHERE  department_id = 50;
```

EMPLOYEE_ID	LAST_NAME	EMAIL	HIRE_DATE	JOB_ID	SALARY	DEPARTMENT_ID
124	Mourgos	KMOURGOS	16-NOV-99	ST_MAN	5800	50
141	Rajs	TRAJS	17-OCT-95	ST_CLERK	3500	50
142	Davies	CDAVIES	29-JAN-97	ST_CLERK	3100	50
143	Matos	RMATOS	15-MAR-98	ST_CLERK	2600	50
144	Vargas	PVARGAS	09-JUL-98	ST_CLERK	2500	50
99999	Taylor	DTAYLOR	07-JUN-99	ST_CLERK	5000	50

6 rows selected.

Copyright © 2004, Oracle. All rights reserved.

Database Transactions

A database transaction consists of one of the following:

- DML statements that constitute one consistent change to the data
- One DDL statement
- One data control language (DCL) statement

Copyright © 2004, Oracle. All rights reserved.

Database Transactions

- Begin when the first DML SQL statement is executed.
- End with one of the following events:
  - A `COMMIT` or `ROLLBACK` statement is issued.
  - A DDL or DCL statement executes (automatic commit).
  - The user exits *i*SQL*Plus.
  - The system crashes.

Copyright © 2004, Oracle. All rights reserved.

Advantages of COMMIT and ROLLBACK Statements

With COMMIT and ROLLBACK statements, you can:

- Ensure data consistency
- Preview data changes before making changes permanent
- Group logically related operations

Copyright © 2004, Oracle. All rights reserved.

Controlling Transactions

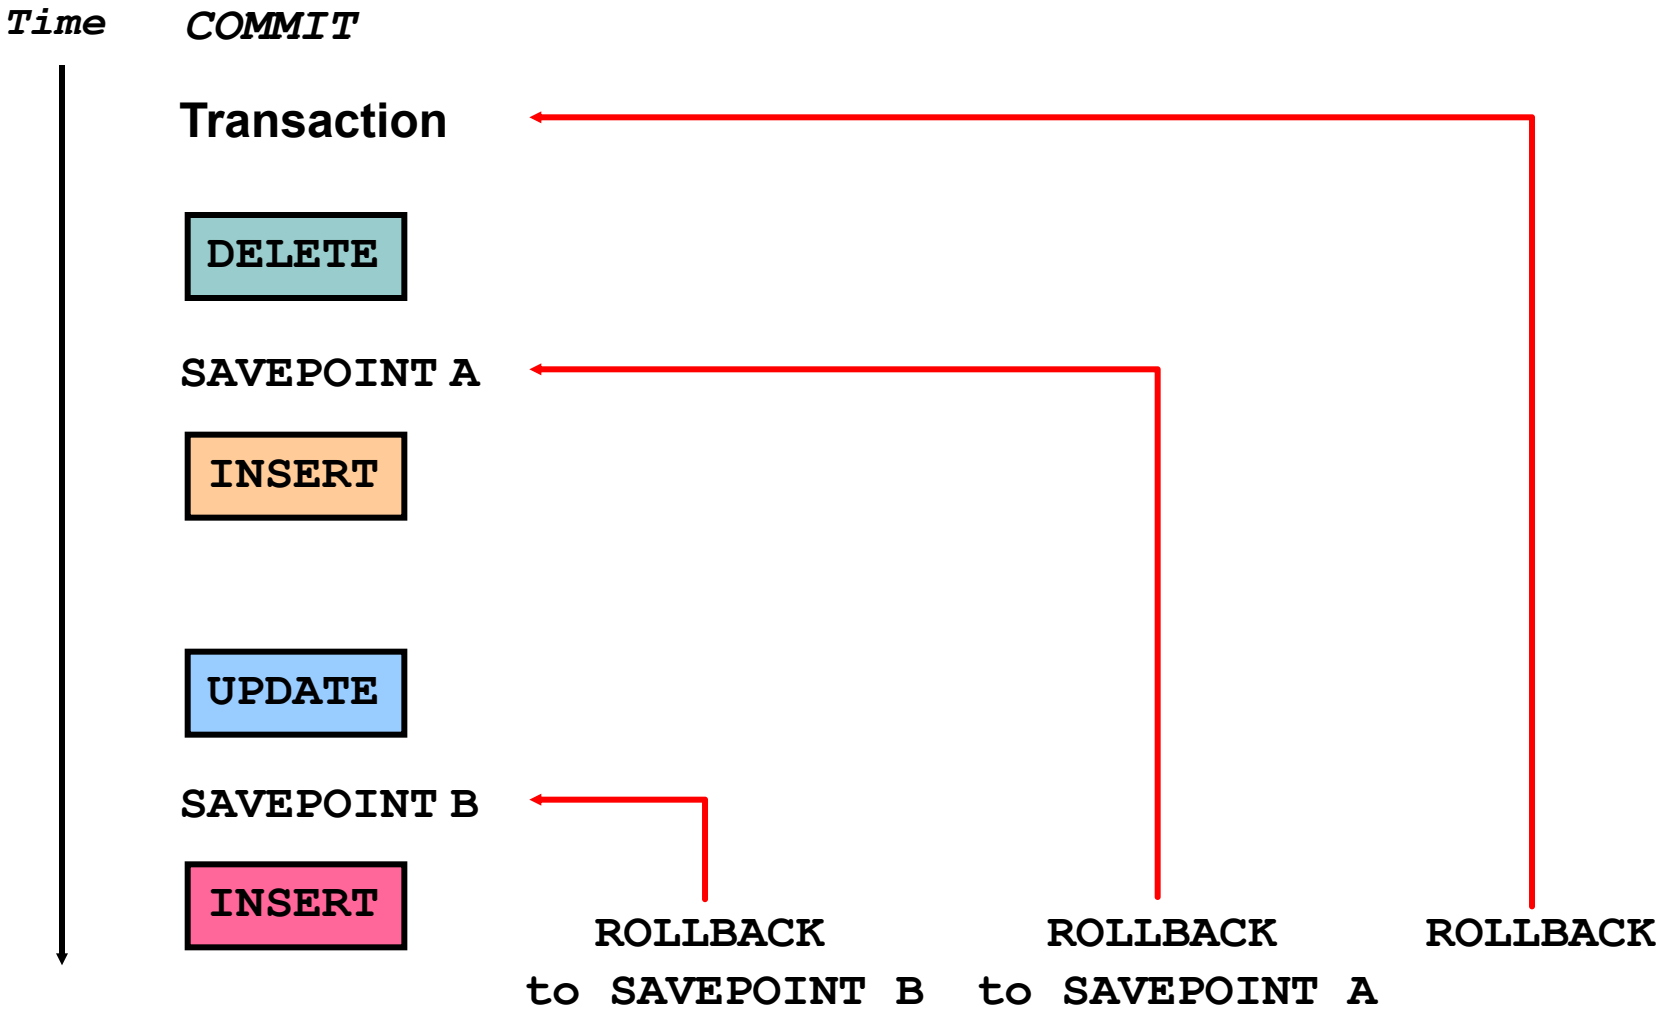

Copyright © 2004, Oracle. All rights reserved.

Rolling Back Changes to a Marker

- Create a marker in a current transaction by using the `SAVEPOINT` statement.
- Roll back to that marker by using the `ROLLBACK TO SAVEPOINT` statement.

```
UPDATE...
SAVEPOINT update_done;
Savepoint created.
INSERT...
ROLLBACK TO update_done;
Rollback complete.
```


Copyright © 2004, Oracle. All rights reserved.

Implicit Transaction Processing

- An automatic commit occurs under the following circumstances:
  - DDL statement is issued
  - DCL statement is issued
  - Normal exit from *i*SQL*Plus, without explicitly issuing `COMMIT` or `ROLLBACK` statements
- An automatic rollback occurs under an abnormal termination of *i*SQL*Plus or a system failure.

Copyright © 2004, Oracle. All rights reserved.

State of the Data Before COMMIT or ROLLBACK

- The previous state of the data can be recovered.
- The current user can review the results of the DML operations by using the SELECT statement.
- Other users *cannot* view the results of the DML statements by the current user.
- The affected rows are *locked*; other users cannot change the data in the affected rows.

Copyright © 2004, Oracle. All rights reserved.

State of the Data After COMMIT

- Data changes are made permanent in the database.
- The previous state of the data is permanently lost.
- All users can view the results.
- Locks on the affected rows are released; those rows are available for other users to manipulate.
- All savepoints are erased.

Copyright © 2004, Oracle. All rights reserved.

Committing Data

- **Make the changes:**

```
DELETE FROM employees
WHERE  employee_id = 99999;
1 row deleted.

INSERT INTO departments
VALUES (290, 'Corporate Tax', NULL, 1700);
1 row created.
```

- **Commit the changes:**

```
COMMIT;
Commit complete.
```


Copyright © 2004, Oracle. All rights reserved.

State of the Data After ROLLBACK

Discard all pending changes by using the ROLLBACK statement:

- Data changes are undone.
- Previous state of the data is restored.
- Locks on the affected rows are released.

```
DELETE FROM copy_emp;
22 rows deleted.
ROLLBACK ;
Rollback complete.
```


Copyright © 2004, Oracle. All rights reserved.

State of the Data After ROLLBACK

```
DELETE FROM test;
25,000 rows deleted.

ROLLBACK;
Rollback complete.

DELETE FROM test WHERE  id = 100;
1 row deleted.

SELECT * FROM   test WHERE  id = 100;
No rows selected.

COMMIT;
Commit complete.
```


Copyright © 2004, Oracle. All rights reserved.

Statement-Level Rollback

- If a single DML statement fails during execution, only that statement is rolled back.
- The Oracle server implements an implicit savepoint.
- All other changes are retained.
- The user should terminate transactions explicitly by executing a `COMMIT` or `ROLLBACK` statement.

Copyright © 2004, Oracle. All rights reserved.

Read Consistency

- Read consistency guarantees a consistent view of the data at all times.
- Changes made by one user do not conflict with changes made by another user.
- Read consistency ensures that on the same data:
  - Readers do not wait for writers
  - Writers do not wait for readers

Copyright © 2004, Oracle. All rights reserved.

Implementation of Read Consistency

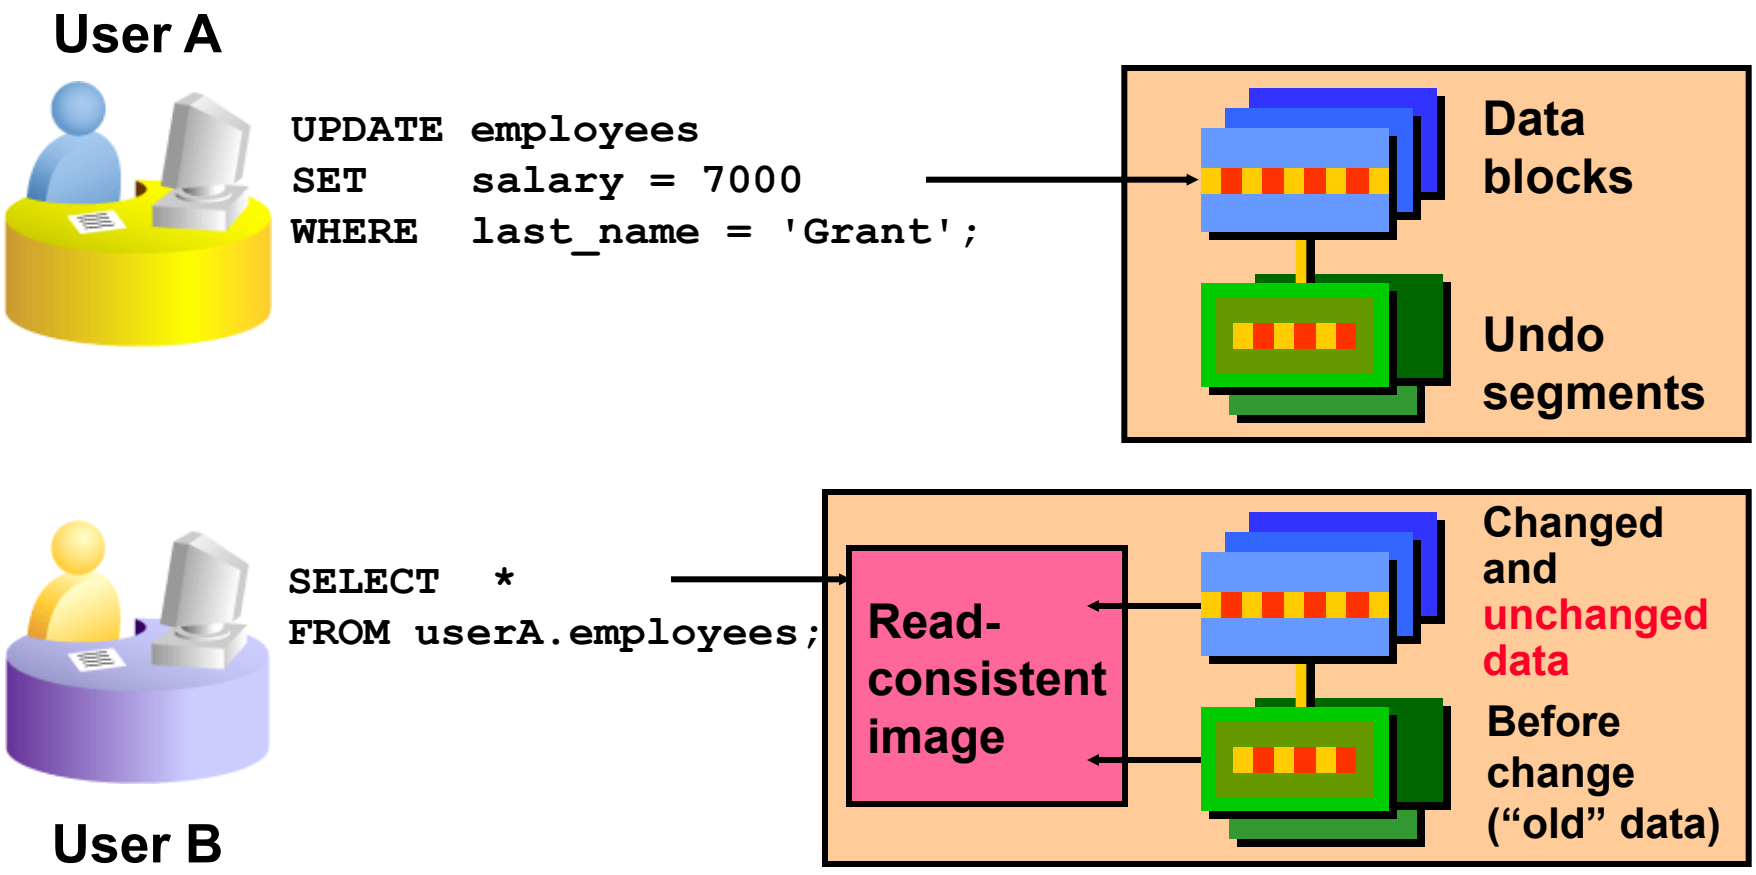

Copyright © 2004, Oracle. All rights reserved.

Summary

In this lesson, you should have learned how to use the following statements:

Function	Description
`INSERT`	Adds a new row to the table
`UPDATE`	Modifies existing rows in the table
`DELETE`	Removes existing rows from the table
`COMMIT`	Makes all pending changes permanent
`SAVEPOINT`	Is used to roll back to the savepoint marker
`ROLLBACK`	Discards all pending data changes

Copyright © 2004, Oracle. All rights reserved.

Practice 8: Overview

This practice covers the following topics:

- Inserting rows into the tables
- Updating and deleting rows in the table
- Controlling transactions

Copyright © 2004, Oracle. All rights reserved.